


# Swivel Adapter (BSP Paralled / Metric Paralled) with Cone and \*ED-Ring DEGE-G/M

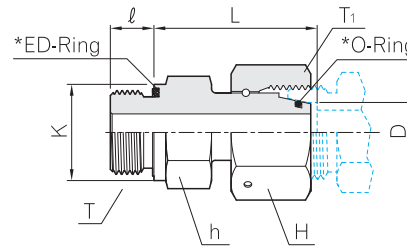

Form E stud end

**for BSP Paralled**

Series	Part No.	Tube O.D. D	H	h	K	L	ℓ	T G(PF)	T <sub>1</sub>	PN(bar)	
										Steel	SS316
L	DEGE 06L - 01G	6	14	14	14	24,5	8	1/8	M 12 x 1,5	500	315
	DEGE 08L - 02G	8	17	19	19	29,5	12	1/4	M 14 x 1,5	500	315
	DEGE 10L - 02G	10	19	19	19	27,5	12	1/4	M 16 x 1,5	500	315
	DEGE 12L - 03G	12	22	22	22	34,0	12	3/8	M 18 x 1,5	400	315
	DEGE 15L - 04G	15	27	27	27	32,0	14	1/2	M 22 x 1,5	400	315
	DEGE 18L - 04G	18	32	27	27	31,5	14	1/2	M 26 x 1,5	400	315
	DEGE 22L - 06G	22	36	32	32	32,5	16	3/4	M 30 x 2	250	160
	DEGE 28L - 08G	28	41	41	40	35,0	18	1	M 36 x 2	250	160
	DEGE 35L - 10G	35	50	50	50	42,5	20	1 1/4	M 45 x 2	250	160
DEGE 42L - 12G	42	60	55	55	46,5	22	1 1/2	M 52 x 2	250	160	
S	DEGE 06S - 02G	6	17	19	19	27,0	12	1/4	M 14 x 1,5	800	630
	DEGE 08S - 02G	8	19	19	19	29,5	12	1/4	M 16 x 1,5	800	630
	DEGE 10S - 03G	10	22	22	22	32,0	12	3/8	M 18 x 1,5	800	630
	DEGE 12S - 03G	12	24	22	22	34,0	12	3/8	M 20 x 1,5	630	630
	DEGE 14S - 04G	14	27	27	27	36,5	14	1/2	M 22 x 1,5	630	630
	DEGE 16S - 04G	16	30	27	27	37,0	14	1/2	M 24 x 1,5	630	400
	DEGE 20S - 06G	20	36	32	32	43,0	16	3/4	M 30 x 2	420	400
	DEGE 25S - 08G	25	46	41	40	48,0	18	1	M 36 x 2	420	400
	DEGE 30S - 10G	30	50	50	50	51,0	20	1 1/4	M 42 x 2	420	400
DEGE 38S - 12G	38	60	55	55	60,0	22	1 1/2	M 52 x 2	420	315	

**for Metric Paralled**

Series	Part No.	Tube O.D. D	H	h	K	L	ℓ	T M(Metric)	T <sub>1</sub>	PN(bar)	
										Steel	SS316
L	DEGE 06L - M10	6	14	14	14	24,5	8	M 10 x 1	M 12 x 1,5	500	315
	DEGE 08L - M12	8	17	19	17	26,5	12	M 12 x 1,5	M 14 x 1,5	500	315
	DEGE 10L - M14	10	19	19	19	27,5	12	M 14 x 1,5	M 16 x 1,5	500	315
	DEGE 12L - M16	12	22	22	22	30,5	12	M 16 x 1,5	M 18 x 1,5	400	315
	DEGE 15L - M18	15	27	24	24	31,5	12	M 18 x 1,5	M 22 x 1,5	400	315
	DEGE 18L - M22	18	32	27	27	31,5	14	M 22 x 1,5	M 26 x 1,5	400	315
	DEGE 22L - M26	22	36	32	32	32,5	16	M 26 x 1,5	M 30 x 2	250	160
	DEGE 28L - M33	28	41	41	40	35,0	18	M 33 x 2	M 36 x 2	250	160
	DEGE 35L - M42	35	50	50	50	42,5	20	M 42 x 2	M 45 x 2	250	160
DEGE 42L - M48	42	60	55	55	46,5	22	M 48 x 2	M 52 x 2	250	160	
S	DEGE 06S - M12	6	17	17	17	27,0	12	M 12 x 1,5	M 14 x 1,5	800	630
	DEGE 08S - M14	8	19	19	19	29,5	12	M 14 x 1,5	M 16 x 1,5	800	630
	DEGE 10S - M16	10	22	22	22	32,0	12	M 16 x 1,5	M 18 x 1,5	800	630
	DEGE 12S - M18	12	24	24	24	34,0	12	M 18 x 1,5	M 20 x 1,5	630	630
	DEGE 14S - M20	14	27	27	26	36,5	14	M 20 x 1,5	M 22 x 1,5	630	630
	DEGE 16S - M22	16	30	27	27	37,0	14	M 22 x 1,5	M 24 x 1,5	630	400
	DEGE 20S - M27	20	36	32	32	43,0	16	M 27 x 2	M 30 x 2	420	400
	DEGE 25S - M33	25	46	41	40	48,0	18	M 33 x 2	M 36 x 2	420	400
	DEGE 30S - M42	30	50	50	50	51,0	20	M 42 x 2	M 42 x 2	420	400
DEGE 38S - M48	38	60	55	55	60,0	22	M 48 x 2	M 52 x 2	420	315	

Dimensions are given for approximate length with tightened nut. All dimensions are in millimeters for reference only, subject to change.  
O-Ring for connection is provided without male stud.  
Please refer to final assembly instructions on page 67.

\* The standard ED-Ring material is NBR(e.g. perbunan®) however FPM(e.g. Viton®) is also available on Request (See Page3).