


Non Return Valve DCV L/S-GED L/S-MED

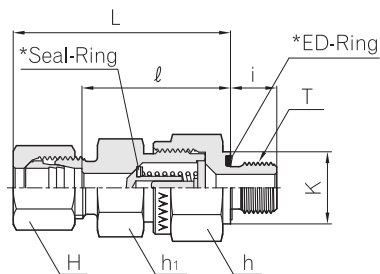

for BSP Paralled

Series	Part No.	Tube O.D.	H	h	h ₁	K	L	ℓ	i	T G(PF)	PN(bar)	
											Steel	SS316
L	DCV06L-01GED	6	14	17	17	14	41.0	26.5	8	1/8	400	250
	DCV08L-02GED	8	17	19	19	19	43.0	28.5	12	1/4	400	250
	DCV10L-02GED	10	19	24	22	19	53.0	38.5	12	1/4	400	250
	DCV12L-03GED	12	22	30	27	22	55.0	40.5	12	3/8	400	250
	DCV15L-04GED	15	27	32	27	27	57.5	42.5	14	1/2	400	250
	DCV18L-04GED	18	32	36	36	27	64.0	48.0	14	1/2	400	160
	DCV22L-06GED	22	36	46	41	32	72.0	56.0	16	3/4	250	160
	DCV28L-08GED	28	41	55	50	40	80.5	64.0	18	1	250	100
	DCV35L-10GED	35	50	60	60	50	91.5	70.0	20	1 1/4	250	100
	DCV42L-12GED	42	60	70	65	55	93.0	70.5	22	1 1/2	250	100
S	DCV06S-02GED	6	17	19	19	19	46.0	31.5	12	1/4	420	400
	DCV08S-02GED	8	19	19	19	19	46.0	31.5	12	1/4	420	400
	DCV10S-03GED	10	22	24	22	22	54.0	38.0	12	3/8	420	400
	DCV12S-03GED	12	24	27	24	22	57.0	41.0	12	3/8	420	400
	DCV14S-04GED	14	27	32	27	27	61.0	43.5	14	1/2	420	315
	DCV16S-04GED	16	30	36	32	27	64.0	46.0	14	1/2	420	315
	DCV20S-06GED	20	36	46	41	32	71.5	50.0	16	3/4	420	250
	DCV25S-08GED	25	46	50	46	40	78.5	54.5	18	1	420	250
	DCV30S-10GED	30	50	60	60	50	90.5	64.0	20	1 1/4	250	250
	DCV38S-12GED	38	60	70	65	55	102.0	71.5	22	1 1/2	250	250

for Metric Paralled

Series	Part No.	Tube O.D.	H	h	h ₁	K	L	ℓ	i	T M(METRIC)	PN(bar)	
											Steel	SS316
L	DCV06L-M10ED	6	14	17	17	14	41.0	26.5	8	M10 x 1.0	400	250
	DCV08L-M12ED	8	17	19	19	17	43.0	28.5	12	M12 x 1.5	400	250
	DCV10L-M14ED	10	19	24	22	19	53.0	38.5	12	M14 x 1.5	400	250
	DCV12L-M16ED	12	22	30	27	22	55.0	40.5	12	M16 x 1.5	400	250
	DCV15L-M18ED	15	27	32	27	24	57.5	42.5	12	M18 x 1.5	400	250
	DCV18L-M22ED	18	32	36	36	27	64.0	48.0	14	M22 x 1.5	400	160
	DCV22L-M26ED	22	36	46	41	32	72.0	56.0	16	M26 x 1.5	250	160
	DCV28L-M33ED	28	41	55	50	40	80.5	64.0	18	M33 x 2.0	250	100
	DCV35L-M42ED	35	50	60	60	50	91.5	70.0	20	M42 x 2.0	250	100
	DCV42L-M48ED	42	60	70	65	55	93.0	70.5	22	M48 x 2.0	250	100
S	DCV06S-M12ED	6	17	19	19	17	46.0	31.5	12	M12 x 1.5	420	400
	DCV08S-M14ED	8	19	19	19	19	46.0	31.5	12	M14 x 1.5	420	400
	DCV10S-M16ED	10	22	24	22	22	54.0	38.0	12	M16 x 1.5	420	400
	DCV12S-M18ED	12	24	27	24	24	57.0	41.0	12	M18 x 1.5	420	400
	DCV14S-M20ED	14	27	32	27	26	61.0	43.5	14	M20 x 1.5	420	315
	DCV16S-M22ED	16	30	36	32	27	64.0	46.0	14	M22 x 1.5	420	315
	DCV20S-M27ED	20	36	46	41	32	71.5	50.0	16	M27 x 2.0	420	250
	DCV25S-M33ED	25	46	50	46	40	78.5	54.5	18	M33 x 2.0	420	250
	DCV30S-M42ED	30	50	60	60	50	90.5	64.0	20	M42 x 2.0	250	250
	DCV38S-M48ED	38	60	70	65	55	102.0	71.5	22	M48 x 2.0	250	250

Dimensions are given for approximate length with tightened nut, All dimensions are in millimeters for reference only, subject to change.

* The standard Seal-Ring material is FPM(e.g. Viton®) however NBR(e.g. perbunan®) is also available on request (See Page 3).

* The standard ED-Ring material is NBR(e.g. perbunan®) however FPM(e.g. Viton®) is also available on Request (See Page3).