



Blanking Plugs with *ED-Ring for Ports
DVSTI-GED/MED

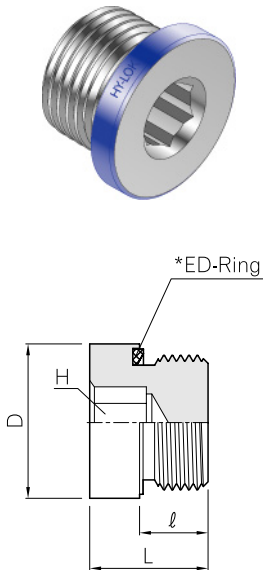

ISO Metric Thread	ISO Parallel Thread	D	H	L	l
M 10 x 1	1/8	14.0	5	12.0	8
M 12 x 1.5	-	17.0	6	17.0	12
M 14 x 1.5	1/4	19.0	6	17.0	12
M 16 x 1.5	3/8	22.0	8	17.0	12
M 18 x 1.5	-	23.9	8	17.0	12
M 20 x 1.5	-	25.9	10	19.0	14
M 22 x 1.5	1/2	27.0	10	19.0	14
M 26 x 1.5	-	31.9	12	21.0	16
M 27 x 2	3/4	32.0	12	21.0	16
M 33 x 2	1	39.9	17	22.5	16
M 42 x 2	1 1/4	49.9	22	22.5	16
M 48 x 2	1 1/2	55.0	24	22.5	16

Blanking Plugs with *O-Ring for Ports acc. to ISO 6149 / DIN3852
DVSTI

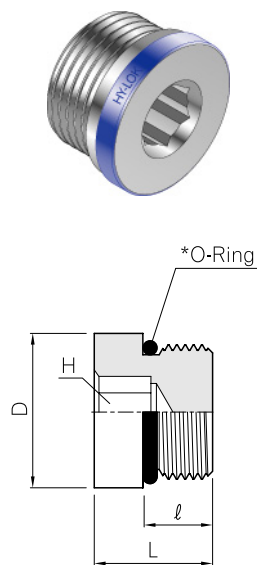

ISO Metric Thread	D	H	L	l
M 10 x 1	13	5	14.0	10.0
M 12 x 1.5	17	6	16.5	11.5
M 14 x 1.5	19	6	16.5	11.5
M 16 x 1.5	21	6	18.0	13.0
M 18 x 1.5	23	8	19.5	14.5
M 22 x 1.5	27	10	20.5	15.5
M 26 x 1.5	31	12	21.0	16.0
M 27 x 2	32	12	24.0	19.0
M 33 x 2	38	17	25.5	19.0
M 42 x 2	48	22	26.0	19.5

All dimensions are in millimeters.
 * The Standard ED-Ring, O-Ring material is NBR(e.g. Perbunan®) however FPM(e.g. Viton®) is also available on request