


Double Male Reducing Union H-ZUR




Part No.	ZCR Size		d		d ₁		L		H	Working Pressure psig (bar)		
	mm	in.	mm	in.	mm	in.	mm	in.	in.	NI	SS	CU
H-ZUR4-2	1/4	1/8	4.55	0.18	2.30	0.09	34.8	1.37	5/8	8000 (551)	10000 (689)	6400 (440)
H-ZUR8-4	1/2	1/4	10.14	0.40	4.55	0.18	43.4	1.71	15/16	3500 (241)	4300 (296)	2800 (192)

Bulkhead Union H-ZBHU

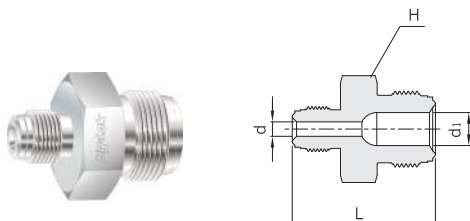

Part No.	ZCR Size	d		L		N		H	H ₁	Panel Hole size		Max. Panel Thickness		Working Pressure psig (bar)		
		mm	in.	mm	in.	mm	in.	in.	in.	mm	in.	mm	inch	NI	SS	CU
H-ZBHU-4	1/4	4.55	0.18	56.6	2.23	33.0	1.30	3/4	3/4	14.5	0.57	11.10	0.44	8000 (551)	10000 (689)	6400 (440)
H-ZBHU-4L46				46.2	1.82	25.1	0.99					3.30	0.13			
H-ZBHU-8	1/2	10.14	0.40	65.3	2.57	37.6	1.48	1 1/16	1 1/16	22.5	0.89	12.70	0.50	3500 (241)	4300 (296)	2800 (192)
H-ZBHU-8L54				54.4	2.14	28.2	1.11					3.30	0.13			

Hy-Lok Tube Fitting Connector H-ZHC

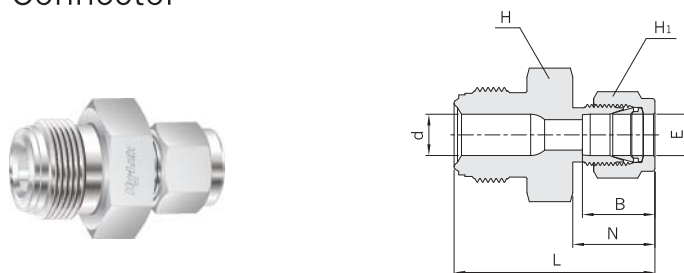

Part No.	ZCR Size	E Tube O.D.	d		L		B		N		H	H ₁	Working Pressure* psig (bar)		
			mm	in.	mm	in.	mm	in.	mm	in.	in.	in.	NI	SS	CU
H-ZHC4-2	1/4	1/8	4.55	0.18	38.6	1.52	12.7	0.50	15.2	0.60	5/8	7/16	8000 (551)	10000 (689)	6400 (440)
H-ZHC4-4		1/4			41.1	1.62	15.2	0.60	17.8	0.70		9/16			
H-ZHC4-6		3/8			43.0	1.70	16.8	0.66	19.3	0.76	11/16	6500 (447)			
H-ZHC8-6	1/2	10.14	0.40	46.7	1.84	22.9	0.90	21.8	0.86	15/16	11/16		3500 (241)	4300 (296)	2800 (192)
H-ZHC8-8				1/2	49.5										

Note : B,N,L are finger - tight dimensions.

Dimensions are reference only, subject to change.